

SOLID STATE TUBE RECTIFIERS ----- PLUG IN TYPE

Part #	Replaces	PIV Per Section (Volts)	DC Output Current @ 55° C (Amps)	P/N Configuration (Refer to Drawing)	Base Type	Dimensions	
						L Seated Height Maximum	D Diameter Maximum
-----	117Z4GT	400	.5	Fig. 12	Octal	2.65	1.25
-----	117Z6GT	600	.5	Fig. 13	Octal	2.65	1.25
-----	OZ46X5	1250	.15	Fig. 13	Octal	2.65	1.25
IN2636	84J, 6Z4	1500	.085	Fig. 11	5 Pin	2.45	1.19
IN2630	6X4, 12X4, 6032, 6202	1500	.085	Fig. 1	Min. 7 Pin	1.75	.87
IN2635	6202, 6X4, 12X4, 6032	1500	.085	Fig. 5	Min. 7 Pin	1.75	.87
IN2490	6202, 6X4, 12X4, 6032 6063	1600	.50	Fig. 1	Min. 7 Pin	1.50/1.562	.718/.782
IN2633	OZ4, 5X4, 5Y4, 6AX5 6X5, 6W5, 6ZY5, 5839 5852	1600	.60	Fig. 3	Octal	2.65	1.25
IN1237	OZ4, 5X4, 5Y4, 6AX5, 5U4, 6X5, 6W5, 6ZY5, 5839, 5Z4, 5852, 6AX5, 6087, 6106, 5931, 5AZ4, 5V3	1600	.75	Fig. 3	Octal	2.65	1.25
IN2631	5AU4, 5AW4, 6087, 6106, 5931, 5AZ4, 5T4, 5U4, 5Z4, 5Y3, 5V4, 5W4, 5AV4, 5AX4, 6004, 5931	1600	.60	Fig. 2	Octal	2.65	1.25
IN1238	5AU4, 5AW4, 6087, 6106, 5931, 5AZ4, 5T4, 5U4, 5Z4, 5Y3, 5V3, 5W4, 5AV4, 5AX4, 6004, 5V4	1600	.75	Fig. 2	Octal	2.65	1.25
IN2389	5AU4, 5AW4, 5AZ4, 5T4, 5U4, 5V4, 5W4, 5Y3, 5Z4, 5AX4, 6004, 5V3	1600	.60	Fig. 2	Octal	1.63	1.19

EDAL[®] INDUSTRIES
SINCE 1938

51 Commerce St. East Haven, CT 06512

(203) 467-2591 TEL
(203) 469-5928 FAX
Email: Info@edal.com
Internet: http://www.edal.com

SOLID STATE TUBE RECTIFIERS ----- PLUG IN TYPE

Part #	Replaces	PIV Per Section (Volts)	DC Output Current @ 55° C (Amps)	P/N Configuration (Refer to Drawing)	Base Type	Dimensions		
						L Seated Height Maximum	D Diameter Maximum	D Diameter Maximum
IN2634	5Z3, 80, 82, 83, 83V	1600	.6	Fig. 4	4 Pin	2.65	1.25	1.25
IN1150	5Z3, 80, 82, 83, 83V	1600	.75	Fig. 8	4 Pin	2.65	1.25	1.25
IN1150A	5Z3, 80, 82, 83, 83V	1600	.75	Fig. 8	4 Pin	2.65	1.25	1.25
IN2632	5R4, 5R4W	2800	.20	Fig. 2	Octal	2.65	1.25	1.25
IN1239	5R4, 5R4W	2800	.50	Fig. 2	Octal	2.65	1.25	1.25
-----	3B25	4500	.50	Fig. 10	Small 4 Pin	5.75	1.219	1.219
IN1262	6AV4, 25W4, 12AX4 6AX4, 60A4, 1204 6864, 17AX4, 6W4, 6V4, 6AV4	4500	.25	Fig. 9	Octal	2.65	1.25	1.25
-----	6DE4	5000	.20	Fig. 12	Octal	3.75	1.32	1.32
-----	836, 1616	7000	.30	Fig. 10	Small 4 Pin	5.75	1.219	1.219
-----	816	8000	.20	Fig. 10	Small 4 Pin	5.75	1.219	1.219
-----	217C	8000	.20	Fig. 6	Jumbo 4 Pin	8.05	2.31	2.31
B184-10	866, 866A, 866AX, 3B28	10000	.50	Fig. 6	Small 4 Pin	5.75	1.219	1.219
IN2637	886, 866A, 3B28	10000	.25	Fig. 6	Small 4 Pin	4.687	1.32	1.32

(203) 467-2591 TEL
 (203) 469-5928 FAX
 Email: Info@edai.com
 Internet: <http://www.edai.com>

EDAL[®] INDUSTRIES
SINCE 1958
 51 Commerce St. East Haven, CT 06512

SOLID STATE TUBE RECTIFIERS ----- PLUG IN TYPE



Part #	Replaces	PIV Per Section (Volts)	DC Output Current @ 55° C (Amps)	P/N Configuration (Refer to Drawing)	Base Type	Dimensions	
						L Seated Height Maximum	D Diameter Maximum
B1145-10	872A, 872AX, 4B32	10000	1.25	Fig. 7	Jumbo 4 Pin	8.05	1.687
B370-10	8008, 8008XE	10000	1.50	Fig. 7	Super Jumbo 4 Pin	8.05	2.31
B1145-15	575A	15000	1.75	Fig. 7	Jumbo 4 Pin	8.05	1.687
B704-15	673	15000	1.75	Fig. 7	Super Jumbo 4 Pin	10.81	2.187
B1145-15	7136	15000	2.50	Fig. 7	Jumbo 4 Pin	8.05	1.687
B370-16	4B31	16000	.20	Fig. 7	Super Jumbo 4 Pin	8.05	2.31
B370-20	579B	20000	.05	Fig. 7	Super Jumbo 4 Pin	8.05	2.31
B184-5	2-25	25000	.05	Fig. 10	Small 4 Pin	5.75	1.219
B370-25	7792	25000	1.50	Fig. 7	Super Jumbo 4 Pin	8.05	2.31

(203) 467-2591 TEL
 (203) 469-5928 FAX
 Email: Info@edal.com
 Internet: <http://www.edal.com>

EDAL® INDUSTRIES
SINCE 1958
 51 Commerce St. East Haven, CT 06512

SOLID STATE TUBE RECTIFIERS ----- PLUG IN TYPE

SOLID STATE RECTIFIER PIN LAYOUT

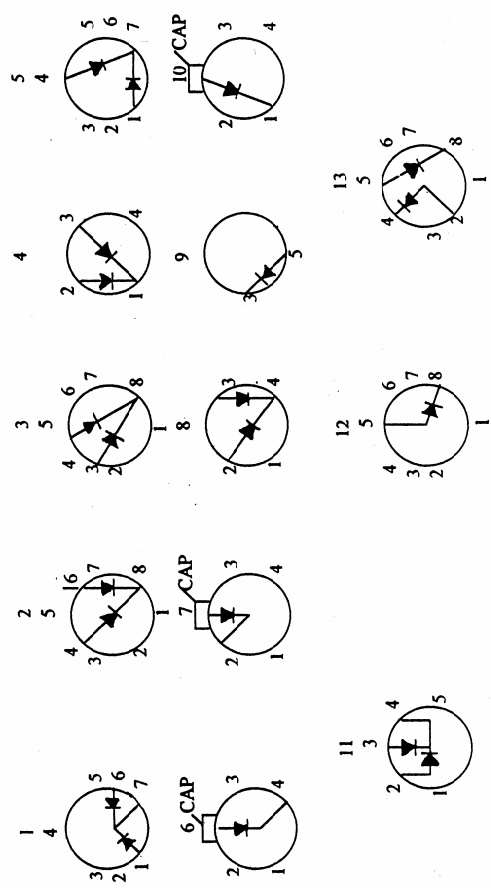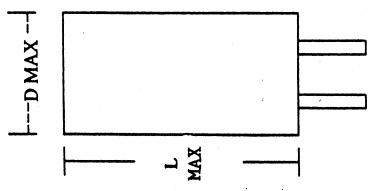

(203) 467-2591 TEL
 (203) 469-5928 FAX
 Email: Info@edal.com
 Internet: http://www.edal.com

EDAL[®] INDUSTRIES
SINCE 1988
 51 Commerce St. East Haven, CT 06512