


SERIES B442

Silicon Bridge Rectifier

DIM.	INCHES		MILLIMETER	
	MIN.	MAX.	MIN.	MAX.
A	0.420	0.460	10.7	11.7
B	0.50		12.7	
C	0.028	0.034	0.76	0.86
D	0.14	0.16	3.60	4.10
E	0.180	0.200	4.6	5.1
F	0.039	0.055	1.00	1.40
G	0.560	0.600	14.2	15.2

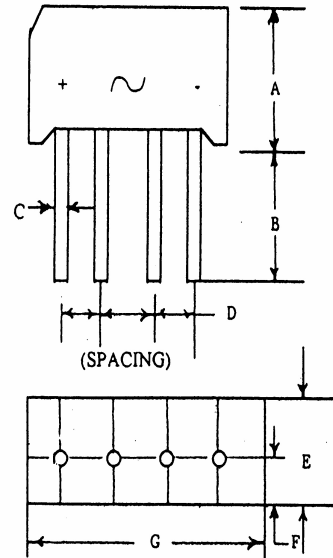

ELECTRICAL RATINGS

MAXIMUM AVERAGE CURRENT SINGLE PHASE FULL WAVE @ 55° C	2.0 AMPS
MAXIMUM SINGLE CYCLE SURGE CURRENT (IFSM)	60 AMPS
MAXIMUM FORWARD VOLTAGE DROP @ 25° C @ I _o AMPS V _F VOLTS (PER SECTION)	1.2 VOLTS
MAXIMUM REVERSE CURRENT @ PIV @ 25° C PER SECTION	10 uA
@ 100°C PER SECTION	.5 mA

PART NUMBER	PIV
B442-5-1	50
B442-10-1	100
B442-20-1	200
B442-40-1	400
B442-60-1	600
B442-80-1	800
B442-100-1	1000
B442-120-1	1200

(203) 467-2591 TEL
 (203) 469-5928 FAX
 Email: Info@ edal.com
 Internet: <http://www.edal.com>

EDAL[®] INDUSTRIES
INC. SINCE 1958

51 Commerce St. East Haven, CT 06512