


SERIES B191

Silicon Bridge Rectifier

DIM.	INCHES		MILLIMETER	
	MIN.	MAX.	MIN.	MAX.
A	0.405	0.445	10.5	11.3
B	0.58	0.62	14.7	15.75
C	0.142	0.158	3.6	4.0
D	0.047	0.127	1.2	3.2
E	0.75		19.1	
F	0.038	0.042	0.97	1.1
G	0.23	0.27	5.8	6.9

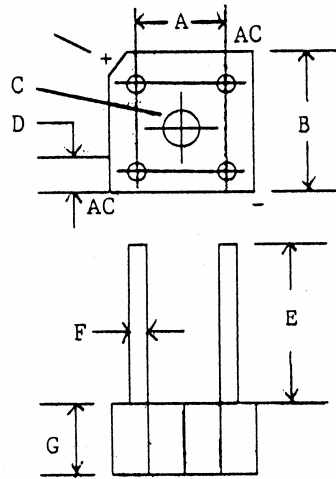

ELECTRICAL RATINGS

MAXIMUM FORWARD CURRENT	
SINGLE PHASE FULL WAVE @ 55° C I _o AMPS	6.0 AMPS
MAXIMUM SINGLE CYCLE SURGE CURRENT	200 AMPS
MAXIMUM FORWARD VOLTAGE DROP @ 25° C	
I _o AMPS (FULL WAVE)	6.0
V VOLTS (PER SECTION)	1.0
MAXIMUM REVERSE CURRENT @ PIV @ 25° C	10 uA




<u>PART NUMBER</u>	<u>PIV</u>
B191-5-1	50
B191-10-1	100
B191-20-1	200
B191-30-1	300
B191-40-1	400
B191-50-1	500
B191-60-1	600
B191-70-1	700
B191-80-1	800
B191-100-1	1000
B191-120-1	1200

(203) 467-2591 TEL
 (203) 469-5928 FAX
 Email: Info@ edal.com
 Internet: http://www.edal.com

EDAL[®] INDUSTRIES
INC. SINCE 1958

51 Commerce St. East Haven, CT 06512

Medium Current Curves

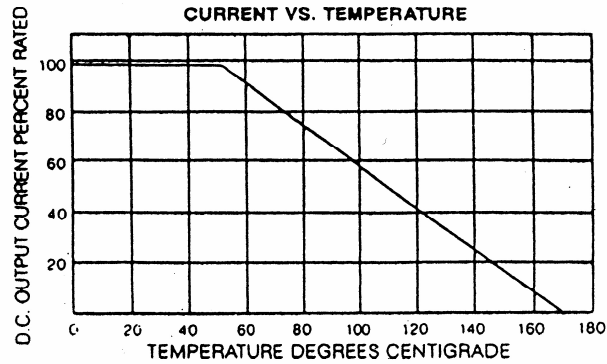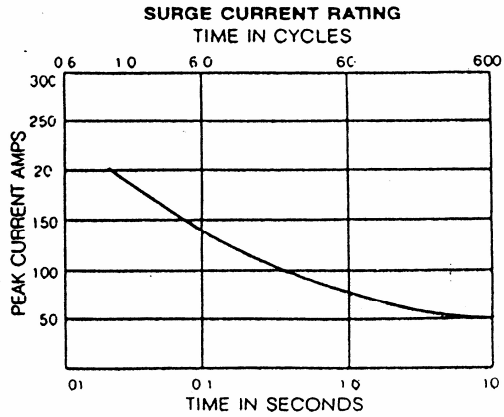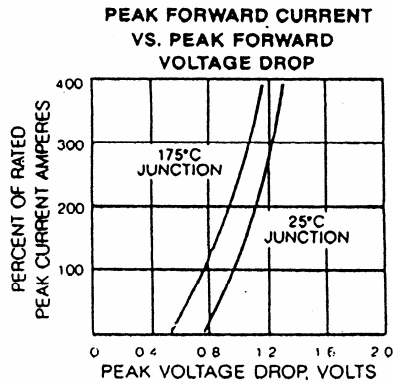

(203) 467-2591 TEL
 (203) 469-5928 FAX
 Email: Info@edal.com
 Internet: <http://www.edal.com>