


SERIES BT933

SUB-MINIATURE SILICON HIGH VOLTAGE RECTIFIER

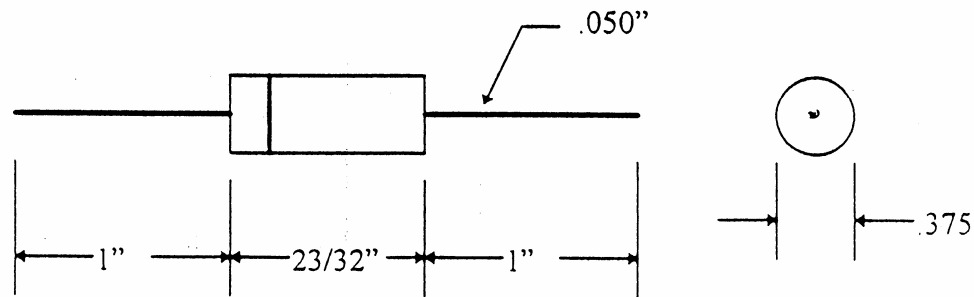

PART NUMBER	PIV VOLTS	I_o AMPS @ 40° C	V_f @ I_o @ 25° C	I_r @ PIV @ 25° C	MAX SINGLE CYCLE SURGE CURRENT @ 60 Hz	T_{rr}
BT933-50	5000	.65	10	10 uA	100 AMPS	100 nSec
BT933-60	6000	.60	12	10 uA	100 AMPS	100 nSec
BT933-70	7000	.55	14	10 uA	100 AMPS	100 nSec
BT933-80	8000	.50	16	10 uA	100 AMPS	100 nSec
BT933-100	10000	.45	20	10 uA	100 AMPS	100 nSec
BT933-120	12000	.37	24	10 uA	100 AMPS	100 nSec
BT933-150	15000	.35	25	10 uA	100 AMPS	100 nSec
BT933-200	20000	.20	32	10 uA	100 AMPS	100 nSec

REVERSE RECOVERY TIME PERFORMED ON STORED CHARGE METER @ 100 mA

OPERATING TEMPERATURE, -55° C TO +150° C

STORAGE TEMPERATURE, -55° C TO +150° C

(203) 467-2591 TEL
 (203) 469-5928 FAX
 Email: Info@ edal.com
 Internet: http://www.edal.com

EDAL[®] INDUSTRIES
INC. SINCE 1958

51 Commerce St. East Haven, CT 06512